

49X

Single Stage Ultra-High Pressure Reducing Regulator



The AURA 49X Series regulators are intended for primary pressure control of non-corrosive gases at a maximum inlet pressure of 6000 PSIG. Available in either chrome-plated brass or 316L stainless steel, these regulators are used in applications such as laboratory research and development, chemical manufacturing, pharmaceutical manufacturing and gauge calibration. With both front and rear panel-mounting options included, combined with AURA's encapsulated seat design, the 49X Series provides the flexibility and reliability for critical high pressure applications.

49X Features

Large Piston Sensor

- Safely control pressures to 6000 PSIG

10 Micron 360° Filter

- Significantly more filtration than disk

Pressure Ranges 0-750 to 0-6000 PSIG

- Broad range of applications

Low Wetted Surface Area

- Minimal purge requirements

Encapsulated Seat

- Increased serviceability and life



49X

Single Stage Ultra-High Pressure Reducing Regulators Technical Data and Product Specifications

Materials of Construction

Body and Bonnet

- Chrome-plated brass
- 316L stainless steel body and 304 bonnet

Seat

- PCTFE (3000 and 4500 PSIG maximum inlet pressure)
- Arlon® (PEEK) (6000 PSIG maximum inlet pressure)

Piston

- Brass barstock
- 316L stainless steel

10 Micron 360° Inlet Filter

- Sintered bronze
- 316L stainless steel

Internal Seals

- FKM

Weight (bare body)

- 5.59 lbs. (2.54 kg)

Functional Specifications

Maximum Inlet Pressure

- 6000 PSIG (415 BAR)

Temperature Range

- -40°F to 140°F (-40°C to 60°C)

2 1/2" Diameter Gauges


- Chrome-plated brass
- Stainless steel

Ports


- 1/4" FPT

Cv


- 0.1

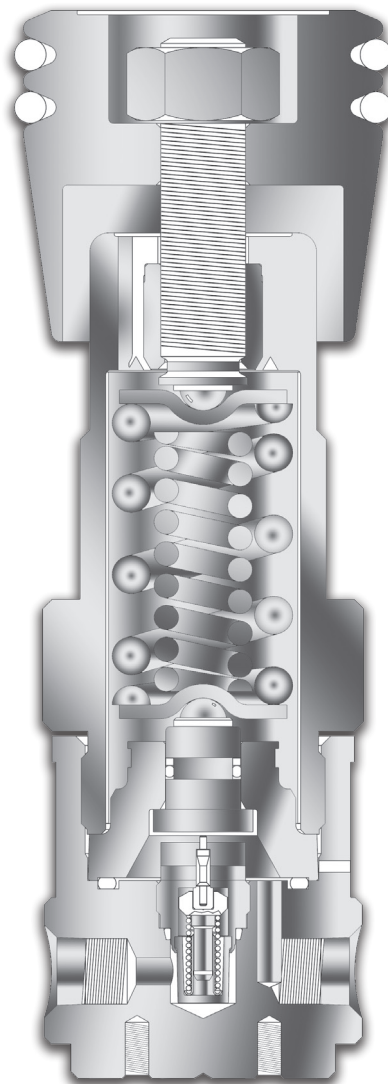


49X 3000 PSIG Inlet Pressure

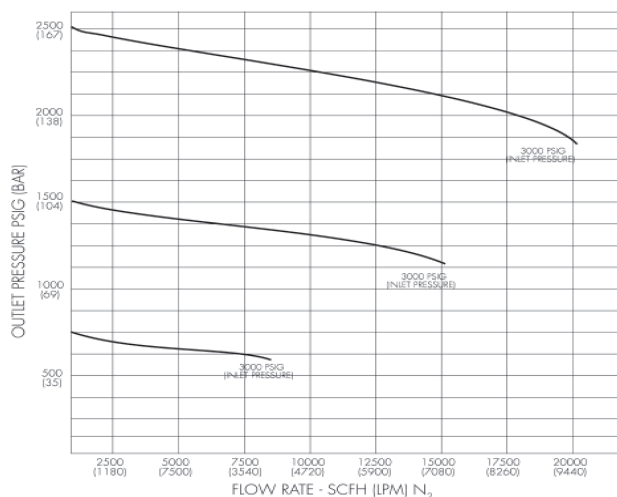

49X 6000 PSIG Inlet Pressure

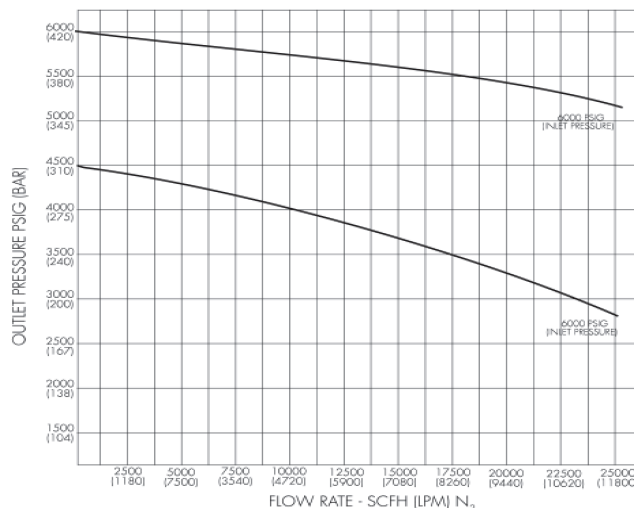

Mounting and Installing Information

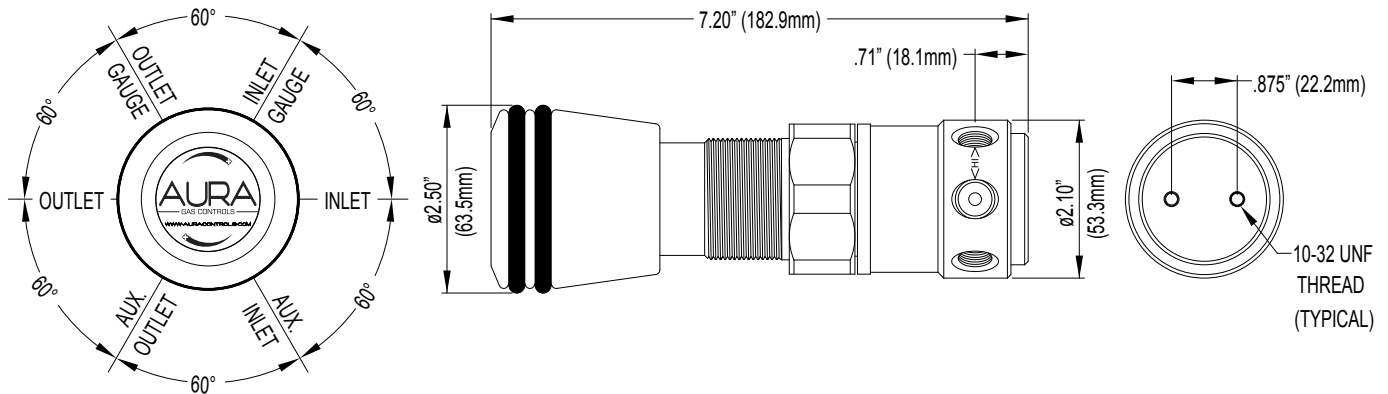

Ordering Information

49 3 4 5 6 7 -AC- 12 13 14

Digit 3 - Material of Construction

- 2 = Chrome-plated brass
- 3 = 316L Stainless steel

Digit 4 - Outlet Pressure/Outlet Gauge

- 1 = 0-750/0-1000 PSIG
- 2 = 0-1500/0-4000 PSIG
- 3 = 0-2500/0-4000 PSIG
- 4 = 0-4500/0-6000 PSIG
- 5 = 0-6000/0-10,000 PSIG
- 6 = 0-3500/0-6000 PSIG
(Option 6 available only on stainless steel model)

Digit 5 - Inlet Maximum/Inlet Gauge

- 0 = 6000 PSIG/None
- 3 = 3000 PSIG/0-4000 PSIG
- 8 = 5500 PSIG/0-6000 PSIG
- 9 = 6000 PSIG/0-10,000 PSIG

Digit 6 - Outlet Assembly

- 0 = 1/4" FPT
- 1 = 1/4" MPT
- 2 = 1/4" Compression tube fitting
- 5 = Needle valve with 1/4" MPT
- 6 = 1/8" Compression tube fitting
- 7 = 3/8" Compression tube fitting
- F = Needle valve with 1/4" compression tube fitting
- M = 6mm Compression tube fitting

Digit 7 - Gauge Scale

- 0 = Bare body
- 1 = PSIG/kPa
- 2 = BAR/PSIG

Digits 12-14 - Inlet Connection

- CGA
- DIN 477
- BS 341
- and others available

Accessories:

- Panel mount kit
EXPA 0002-01-000-000
- Stainless steel control station
EXPV 0006-01-000-1SN

NOTE: If you are unable to find a configuration specific to your application's needs, call AURA Gas Controls directly at 800.582.2565.



1501 Harpers Road, Virginia Beach, Virginia 23454

800.582.2565

www.AURACONTROLS.com

Registered ISO 9001



49X

Single Stage Ultra-High Pressure Reducing Regulator



AURA™
— GAS CONTROLS —

1501 Harpers Road, Virginia Beach, Virginia 23454

800.582.2565

www.AURACONTROLS.com

Registered ISO 9001



ADC3179-49X-D