

Flexible Hoses




Flexible Hoses

The EXPH Series flexible hoses are intended for use in systems where a flexible connection is preferable to the use of rigid tubing. Most commonly, flexible hoses are used as hoses to connect cylinders to wall-mounted regulators or manifold headers.

Materials and Specifications

Minimum Bend Radius	4.0" (101.6mm)
Temperature Range	-450°F to 1500°F (-265°C to 815°C)
Oxygen Service	Cleaned to CGA G4.1 specifications

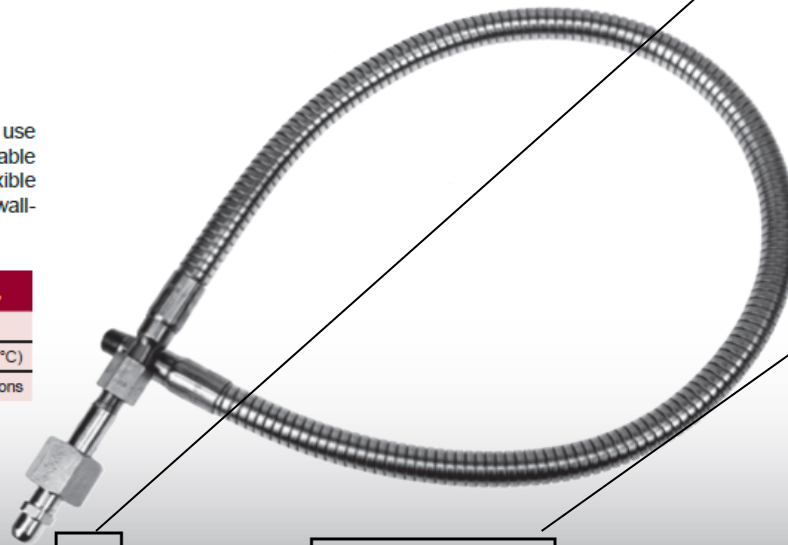

EXPH000 -01-CON-000

1= 36" 316L SS-lined w/SS CGA

2= 36" 316L SS-lined w/brass CGA

4= 36" LumiShield w/LumiShield CGA

8= 36" Monel-lined f/O2 service

000- none (1/4" FNPT)
CGA- CGA cylinder connection type

